

Dust-Free Vacuum System Filtration



Conair Dust Collectors keep your plant free of air-born dust and fines and prevent dust from fouling the vacuum pumps.

A central vacuum dust collector allows dust filtration to take place at the floor level. An air-tight collection container makes the removal of fines quick and easy.

Automatic filter cleaning is standard, lengthening the time between service requirements. DC1 and DC2 models use an integrated “popper valve” to remove dust from the filter, while the DC3 has a sophisticated sequential blowback system.

Unique Features

- EASY, NO TOOLS EMPTYING AND SERVICING
- Automatic filter cleaning
- Tangential air/dust inlet
- Flexible application
- Simple maintenance



Remove the dust collection canister without tools for easy dumping.



No-tools filter removal provides simplified filter maintenance.


Technical Specifications

Model	DC 1	DC 2
Pump size range Hp (kW)	3-7.5 {2.2-5.6}	10-25 {7.5-18.7}
Vacuum line size OD inch (mm)	2", 2.5" {40}	2.5", 3"
Filter area ft ² (M ²)	42.8 {4.0}	100.3 {9.3}
Maximum collection ft ³ {liters}	1.1 {31.1}	2.1 {59.4}
Recommended dust collection ft ³ {liters}	0.75 {21.2}	1.0 {28.3}
Dimensions - mm		
Height	1473	1701
Width	381	483
Depth	508	483
Installed weight - kg	50	68
Compressed air requirement	80-120 psi {5.5-8.3 bars}	

SPECIFICATION NOTES

* Model DC1 works with Conair pump models PD5, PD7.5. Model DC2 works with PD10, PD15, PD25.

All specifications are subject to change without prior notice.

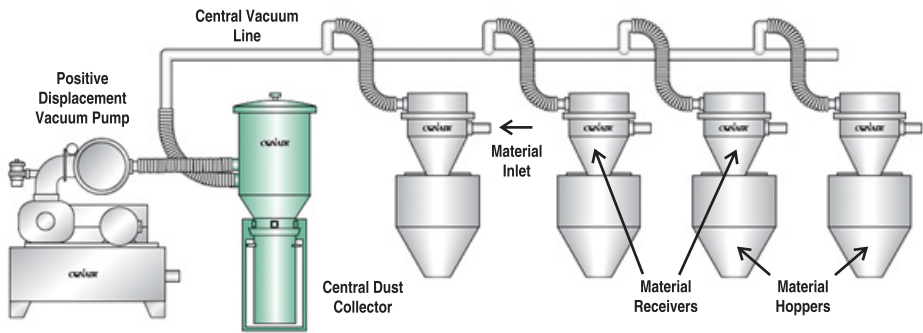

LEADING MANUFACTURER OF PLASTIC AUXILIARY EQUIPMENT

Material Storage | Conveying | Drying | Blending | Heat Transfer | Size Reduction



(An ISO 9001:2015 Certified Organization)

Nu-Vu Conair Pvt. Ltd.

Plot No. 147 & 148, Devraj Industrial Park, Piplaj-Pirana Road, Piplaj, Ahmedabad - 382405, Gujarat, India

☎ +91 79 2970 8147 | ☐ +91 97129 28201, +91 90990 76206

✉ marketingindia@conairgroup.com | 🌐 www.conairgroup.in

