

Edge Trim Cutter



Unique Features



- Gas cylinder for traction rollers assembly for easy access
- Edge trim feeding speed synchronized with extrusion line using inverter drives
- Pneumatically pressurised rollers with automatic adjustment based on thickness of trim
- Scissor like cutting rotating knives can be adjusted on workbench
- Reversible counter knives
- Constant rotary diameter
- The screen has a surface corresponding to 50% of the rotary diameter
- Inbuilt blower and cyclone for regrind evacuation

Optional Features

- Dancing arm with potentiometers
- Different traction rollers (Knurled and Smooth)
- Level control

Suitable For

- Trims recovery from extruded PS, PP, PET, PA sheet with thickness from 0.3 to 3.0 mm

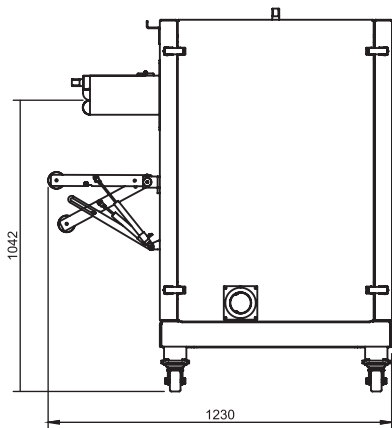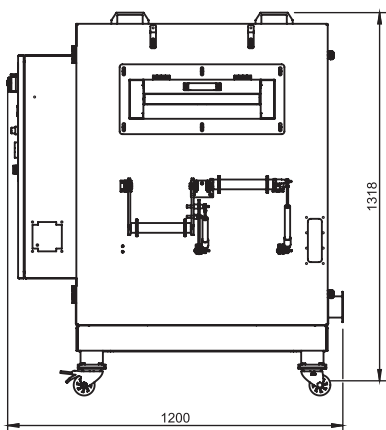

Technical Specifications

Type	Unit	CTRK 42-20	
		Single Traction Roller	Double Traction Roller
Feeding opening	mm	310 x 20	95 x 20 (2x)
Rotor diameter	mm	180	180
Rotary knives	nos	3	3
Length of rotary knives	mm	415	415
Fixed counter knives	nos	2	2
Catch bin capacity	ltrs	12	12
Approx. output with standard screen (φφ7mm)	kg / hr	50-80	50-80
Motor power	kW / hp	4.07 / 5.5	4.44 / 6
Weight	kg	560	560

All specifications are subject to change without prior notice.

LEADING MANUFACTURER OF PLASTIC AUXILIARY EQUIPMENT

Material Storage | Conveying | Drying | Blending | Heat Transfer | Size Reduction



(An ISO 9001:2015 Certified Organization)

Nu-Vu Conair Pvt. Ltd.

Plot No. 147 & 148, Devraj Industrial Park, Piplaj-Pirana Road, Piplaj, Ahmedabad - 382405, Gujarat, India

☎ +91 79 2970 8147 | ☎ +91 97129 28201, +91 90990 76206

✉ marketingindia@conairgroup.com | 🌐 www.conairgroup.in

