


Positive Displacement Pump



Unique Features


- Rotating lobe vacuum blower
- Pump protection filter included
- Easy maintenance
- Ready to install
- Powerful and reliable
- Sound enclosures to reduce noise level (optional)

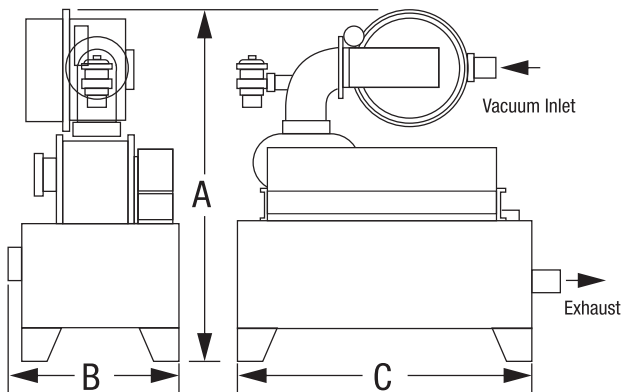

Technical Specifications

Model	PD 5	PD 7.5	PD 10	PD 15	PD 25
Motor Type*	TEFC	TEFC	TEFC	TEFC	TEFC
PERFORMANCE					
Horsepower	5	7.5	10	15	25
Standard CFM at material pickup point @ 10" Hg	76.6	121.2	154.5	201.1	346.2
Average sound level (dba) @ 8", 10" and 12" Hg	86.3	86	85.8	88.8	93
DIMENSIONS inches and millimeters {mm}					
Standard intel size (OD)	2" {51}	2.5" {64}	2.5" {64}	3" {76}	4" {102}
Exhaust (OD)	2.5" {64}	2.5" {64}	4" {102}	4" {102}	4" {102}
Dimension in mm - Height A	940	1041	1295	1295	1321
- Width B	889	889	1003	1003	1003
- Depth C	686	686	838	838	864
Installed weight - kg	147	168	283	290	435
VOLTAGE	415V, 3 Phase, 50 Hz				

All specifications are subject to change without prior notice.

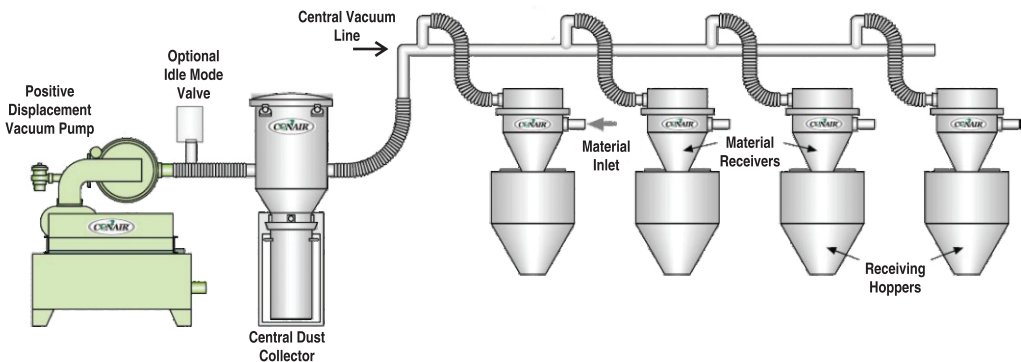

LEADING MANUFACTURER OF PLASTIC AUXILIARY EQUIPMENT

Material Storage | Conveying | Drying | Blending | Heat Transfer | Size Reduction



(An ISO 9001:2015 Certified Organization)

Nu-Vu Conair Pvt. Ltd.

Plot No. 147 & 148, Devraj Industrial Park, Piplaj-Pirana Road, Piplaj, Ahmedabad - 382405, Gujarat, India

+91 79 2970 8147 | +91 97129 28201, +91 90990 76206

marketingindia@conairgroup.com | www.conairgroup.in

