


# Flexible Expandable Control for Conveying

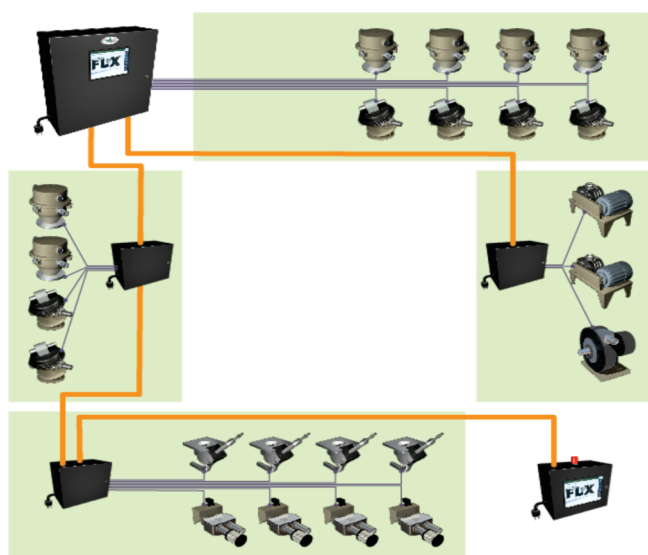

Start small and grow, or bring all conveying needs into a common system. The FLX flexible control system utilizes a combination of centralized I/O and expansion modules, interconnected via industrial Ethernet to provide control of up to 128 receivers, 40 pumps (plus 2 back-up pumps) and 256 source valves. A full color touch screen with descriptive picture icons assures that even with little or no training, any user will be comfortable monitoring or making change to up to 40 independently operating vacuum systems.

- Ratio loading
- Purge valve and pocket valve
- Ratio valve and positive discharge valve
- Fill sensor
- Remote HMI touch screen, ethernet connectivity, remote alarm and web visualization
- Modular I/O bundles
- Economical and expandable
- Preventative maintenance
- Central vacuum loading
- Multi-source
- Valve sharing

## Technical Specifications

Model	FLX - 8 / 16 / 24 / 32 / 64 / 128
Maximum number of vacuum receivers	8 / 16 / 24 / 32 / 64 / 128
Maximum number of vacuum pumps	40 (plus 2 back-up)
Operator interface (standard) touchscreen	Up to FLX 64 - 5.6 inch / FLX 128 - 8 inch
Output voltage to receivers / valves	24 VDC (24/120 VAC optional)
Input voltage to receivers	24 VDC
Output voltage to pumps	24 VDC (24/120 VAC optional)
Voltage / Amps	120 VAC / 16 Amps
<b>Weight - kg</b>	
Installed	27

All specifications are subject to change without prior notice.

**Joint Venture with The Conair Group, USA**  
**A World Leader in Plastic Auxiliary Equipment Manufacturing**



(An ISO 9001:2015 Certified Organization)

### Nu-Vu Conair Pvt. Ltd.

Plot No. 147, 148 & 154, Devraj Industrial Park, Piplaj-Pirana Road, Piplaj, Ahmedabad - 382405, Gujarat, India

☎ +91 79 2970 8147 | ☎ +91 97129 28201, +91 90990 76206

✉ marketingindia@conairgroup.com | 🌐 www.conairgroup.com/india

📘 www.facebook.com/nuvuconair